


Skyline 3E

When you need access to great heights: Optimised transport dimensions, working heights of up to 16.35 m with convenient height adjustment.

Product description

- When you need access to great heights: Optimised transport dimensions, working heights of up to 16.35 m with convenient height adjustment.
- Wheel assemblies with abrasion-resistant surfaces that will not damage the wall.
- Two ropes so that centre and top sections can be adjusted separately.
- Rung-by-rung height adjustment in a grid of 280 mm.
- The ladder with the Order No. 40448 is equipped with 2 light alloy supports for easy erection and stabilisation. (Not to be used as free-standing ladders!)
- Locks securely thanks to automatic spring loaded pawls.
- Improved plastic guide.
- Replaceable 2-component plastic end caps ensure secure positioning without the risk of slipping.
- Rungs and stiles made from extruded aluminium sections.

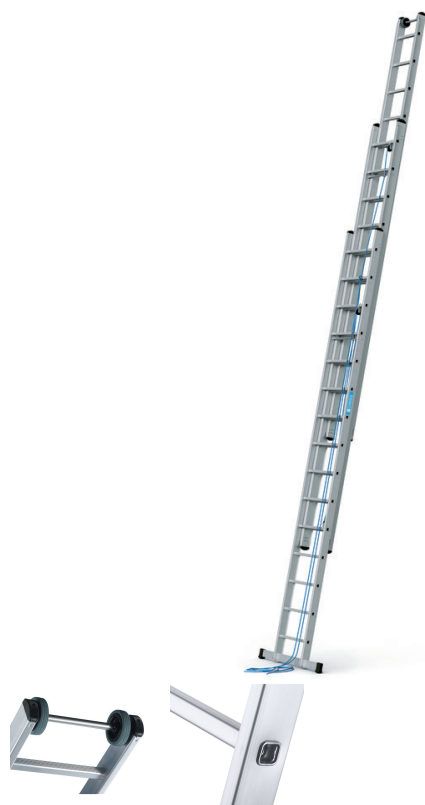

Hints and special features

Complies with EN 131 Professional.

Product features

Coating: natural
 Connection Stile-Rung: flanged
 Load capacity: max. 150 kg
 Material: Aluminium
 Pitch rung/tread: 270 mm
 Standards: EN 131 professional
 Stile depth: 98 mm
 Tread depth: 30 mm
 Type rung/tread: serrated
 Warranty: 10 years
 Wheels: Rubber
 Wide crosspiece: 1.2 m

Product variants

Order number	External width of lower ladder	Number of rungs	Number of rungs	Overall length, extended	Overall length, retracted	Stile depth	Stile depth
40446	560 mm	15	3 × 15	10.55 m	4.4 m	86 mm	86mm / 98mm
40447	560 mm	18	3 × 18	12.55 m	5.25 m	86 mm	86mm / 98mm
40448	590 mm	20	3 × 20	14.2 m	5.8 m	98 mm	98mm / 98mm



Order number	Transport dimensions	Weight	Working height
40446	4.420 mm × 565 mm × 228 mm	45 kg	11.15 m
40447	5.260 mm × 565 mm × 228 mm	53 kg	13.1 m
40448	5.820 mm × 718 mm × 242 mm	68 kg	14.7 m