


Stainless-steel shaft covers with cover trough

Shaft covers that can be walked or driven on, with customisable inner and outer surface.

Product description

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapering section design, therefore easy to open. No sticking.
- Easy to open, no jamming.
- EPDM seal (petrol-resistant seal available on request).
- Odour-tight and impervious to surface water.
- Load with choice of surface: test force 125 kN (=12.5 t), only after cover trough has been filled by customer with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.

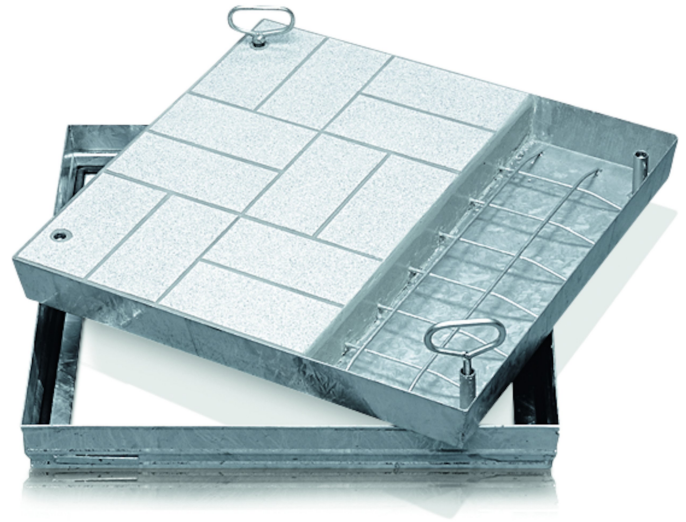

Product features

Design height: 90 mm

Trough depth: 80 mm

Product variants

Order number	Ext. length	Ext. width	Inside shaft length	Inside shaft size	Inside shaft width	Outside dimensions L x W x H	Transport dimensions
47060	420 mm	420 mm	300 mm	300mm x 300mm	300 mm	420 mm x 420 mm	420 mm x 420 mm x 90 mm
47061	570 mm	570 mm	450 mm	450mm x 450mm	450 mm	570 mm x 570 mm	570 mm x 570 mm x 90 mm
47062	620 mm	620 mm	500 mm	500mm x 500mm	500 mm	620 mm x 620 mm	620 mm x 620 mm x 90 mm
47064	720 mm	720 mm	600 mm	600mm x 600mm	600 mm	720 mm x 720 mm	720 mm x 720 mm x 90 mm
47065	755 mm	755 mm	635 mm	635mm x 635mm	635 mm	755 mm x 755 mm	750 mm x 750 mm x 90 mm
47067	920 mm	920 mm	800 mm	800mm x 800mm	800 mm	920 mm x 920 mm	920 mm x 920 mm x 90 mm
47070	1120 mm	1120 mm	1000 mm	1.000mm x 1.000mm	1000 mm	1.120 mm x 1.120 mm	1.120 mm x 1.120 mm x 90 mm