


R13step B - 41559

The ladder with the highest non-slip performance thanks to R13 treads for oily and wet environments.

Product description

- The ladder with the highest non-slip performance thanks to R13 treads for oily and wet environments.
- 80 mm deep treads with R13 surface and perforations to drain fast.
- Abrasion-resistant, anodised stiles.
- Hinges of diecast aluminium.
- High-strength perlon belts prevent splay.
- Maximum working heights thanks to 280mm high access.
- Replaceable 2-component plastic end caps ensure positioning without risk of slipping and at the same time provide firm seating in the stile.

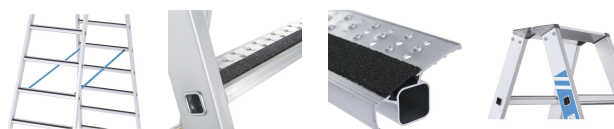

Product features

Anti splay: Belt strap
 Base: 1,77 m × 0,59 m
 Coating: anodised
 Connection Stile-Rung: flanged
 Load capacity: max. 150 kg
 Material: Aluminium
 Number of treads: 8
 Number of treads: 2 × 8
 Overall base width: 0.59 m
 Overall length: 2.27 m
 Pitch rung/tread: 265 mm
 Standards: EN 131 professional
 Stile depth: 73 mm
 Transport dimensions: approx. 2.280 mm × approx. 590 mm × approx. 220 mm
 Tread depth: 80 mm
 Type rung/tread: R13 tread
 Vertical ladder height: 2.1 m
 Warranty: 10 years
 Weight: 11.5 kg
 Working height: 3.6 m

Hints and special features

Complies with EN 131 Professional.

Accessories and spare parts

Image	Order number	Name	Type
	40115	Bucket hook	Accessory
	40920	Hook-on tool box	Accessory



Image	Order number	Name	Type
	40300	Toolbag	Accessory
	40301	Toolbag	Accessory
	40998	Ladder holder, lockable	Accessory
	40960	Tension strap	Accessory
	8210	Theft protection	Accessory
	8206	Folding bracket	Accessory
	8211	Folding bracket	Accessory
	40226	Pivot foot with rubber tread 125 x 50 mm	Parts list
	40997	Pivot foot with rubber tread 100 x 55 mm	Parts list
	40251	Horizontal stabiliser bar for retrofitting	Parts list
	40252	Fastening chain	Parts list
	40939	Ground spikes	Parts list
	40922	Stile extension	Parts list
	824352	Plug-in end cap	Spare part
	829761	Cast hinge	Spare part
	827883	Splay prevention (belt strap)	Spare part
	829765	Tread (top)	Spare part