


R13step B

The ladder with the highest non-slip performance thanks to R13 treads for oily and wet environments.

Product description

- The ladder with the highest non-slip performance thanks to R13 treads for oily and wet environments.
- 80 mm deep treads with R13 surface and perforations to drain fast.
- Abrasion-resistant, anodised stiles.
- Hinges of diecast aluminium.
- High-strength perlon belts prevent splay.
- Maximum working heights thanks to 280mm high access.
- Replaceable 2-component plastic end caps ensure positioning without risk of slipping and at the same time provide firm seating in the stile.

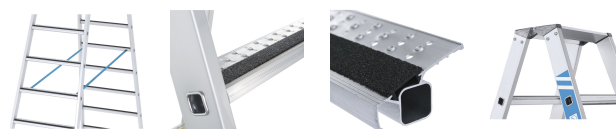

Product features

Anti splay: Belt strap
 Coating: anodised
 Connection Stile-Rung: flanged
 Load capacity: max. 150 kg
 Material: Aluminium
 Pitch rung/tread: 265 mm
 Standards: EN 131 professional
 Stile depth: 73 mm
 Tread depth: 80 mm
 Type rung/tread: R13 tread
 Warranty: 10 years

Hints and special features

Complies with EN 131 Professional.

Product variants

Order number	Base	Number of treads	Number of treads	Overall base width	Overall length	Transport dimensions	Vertical ladder height
41549	0,79 m × 0,44 m	3	2 × 3	0.44 m	0.88 m	approx. 880 mm × approx. 450 mm × approx. 220 mm	0.8 m
41551	0,98 m × 0,47 m	4	2 × 4	0.47 m	1.15 m	approx. 1.155 mm × approx. 475 mm × approx. 220 mm	1.06 m
41553	1,18 m × 0,5 m	5	2 × 5	0.5 m	1.42 m	approx. 1.440 mm × approx. 500 mm × approx. 220 mm	1.32 m
41555	1,37 m × 0,53 m	6	2 × 6	0.53 m	1.7 m	approx. 1.750 mm × approx. 530 mm × approx. 220 mm	1.58 m
41557	1,57 m × 0,56 m	7	2 × 7	0.56 m	1.98 m	approx. 2.000 mm × approx. 560 mm × approx. 220 mm	1.84 m
41559	1,77 m × 0,59 m	8	2 × 8	0.59 m	2.27 m	approx. 2.280 mm × approx. 590 mm × approx. 220 mm	2.1 m
41561	2,16 m × 0,65 m	10	2 × 10	0.65 m	2.83 m	approx. 2.840 mm × approx. 650 mm × approx. 220 mm	2.62 m
41563	2,55 m × 0,71 m	12	2 × 12	0.71 m	3.39 m	approx. 3.390 mm × approx. 710 mm × approx. 220 mm	3.15 m
41565	2,95 m × 0,77 m	14	2 × 14	0.77 m	3.95 m	approx. 3.950 mm × approx. 770 mm × approx. 220 mm	3.67 m



Order number	Base	Number of treads	Number of treads	Overall base width	Overall length	Transport dimensions	Vertical ladder height
	m					220 mm	
41567	3,34 m × 0,83 m	16	2 × 16	0.83 m	4.51 m	approx. 4.510 mm × approx. 830 mm × approx. 220 mm	4.21 m

Order number	Weight	Working height
41549	5.8 kg	2.3 m
41551	7.2 kg	2.55 m
41553	8.4 kg	2.8 m
41555	9.3 kg	3.05 m
41557	10.1 kg	3.3 m
41559	11.5 kg	3.6 m
41561	14.7 kg	4.15 m
41563	17.8 kg	4.65 m
41565	22.6 kg	5.2 m
41567	26.6 kg	5.7 m