


Steel shaft covers, galvanised steel with trough

Walkable or drivable shaft covers with choice of surface for indoor and outdoor use.

Product description

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapered profile-section construction with multiple bolted joints.
- Easy to open, no jamming.
- Odour-tight and impervious to surface water.
- Load capacity for shaft cover with cover trough: test force 125 kN (= 12.5 t), only after the cover trough has been filled with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.
- Trough depth 80 mm (of which 40 mm covered with construction steel grating and 40 mm free area)

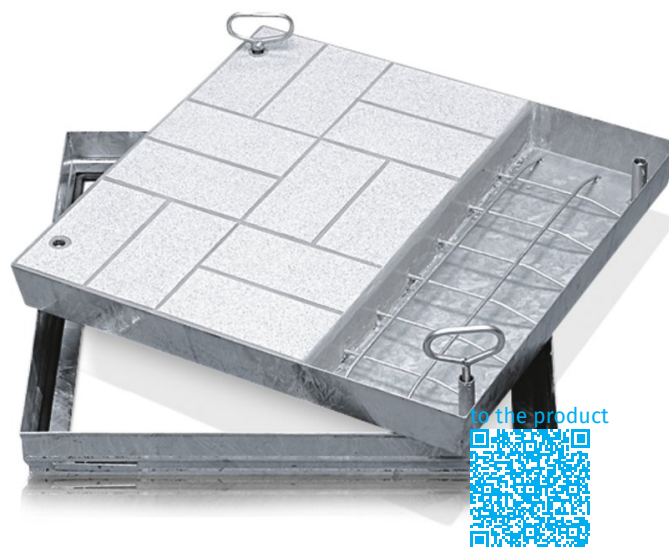

Product features

Design height: 90 mm

Material, cover: Steel, galvanised

Material, frame: Steel, galvanised

Trough depth: 80 mm

Product variants

Order number	Inside shaft length	Inside shaft size	Inside shaft width	Outside dimensions L x W x H	Transport dimensions
47030	450 mm	450mm x 450mm	450 mm	570 mm x 570 mm	570 mm x 570 mm x 70 mm
47031	500 mm	500mm x 500mm	500 mm	620 mm x 620 mm	620 mm x 620 mm x 70 mm
47032	600 mm	600mm x 400mm	400 mm	720 mm x 520 mm	720 mm x 520 mm x 70 mm
47033	600 mm	600mm x 600mm	600 mm	720 mm x 720 mm	720 mm x 720 mm x 70 mm
47034	635 mm	635mm x 635mm	635 mm	755 mm x 755 mm	750 mm x 770 mm x 90 mm
47035	800 mm	800mm x 600mm	600 mm	920 mm x 720 mm	920 mm x 720 mm x 90 mm
47036	800 mm	800mm x 800mm	800 mm	920 mm x 920 mm	920 mm x 920 mm x 90 mm
47037	1000 mm	1.000mm x 600mm	600 mm	1.120 mm x 720 mm	1.120 mm x 720 mm x 90 mm
47038	1000 mm	1.000mm x 800mm	800 mm	1.120 mm x 920 mm	1.120 mm x 920 mm x 90 mm
47039	1000 mm	1.000mm x 1.000mm	1000 mm	1.120 mm x 1.120 mm	1.120 mm x 1.120 mm x 90 mm